FLOW SIGHT GLASS GAUGE

F SERIES – Flange Connection With Spring Paddle

The flow sight glass was designed with spring paddle for easy observastion of flowing fluid from any direction.

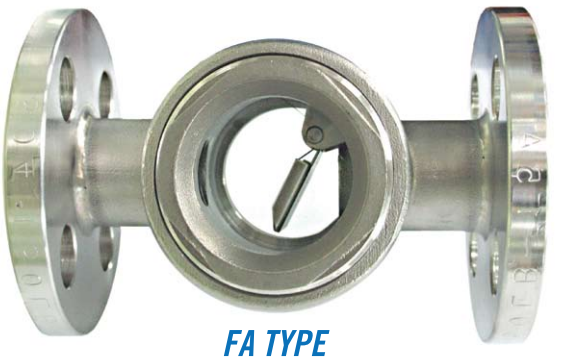

FA TYPE

Technical Data

Service: – Compatible gas and liquid – Water treatment system
– Industrial flow system – Double window indication

Material: Body–SS316, Paddle–SS316, Spring–SS316
Guge–Glass, Gasket–Teflon, Gore-Tex

Max working temperature: 200°C

Max working pressure: FA type-10 kg/cm^2 at 25°C air
FB type-15 kg/cm^2 at 25°C air
(FA,FB upon pressure on request available)

Dimension

FA Type

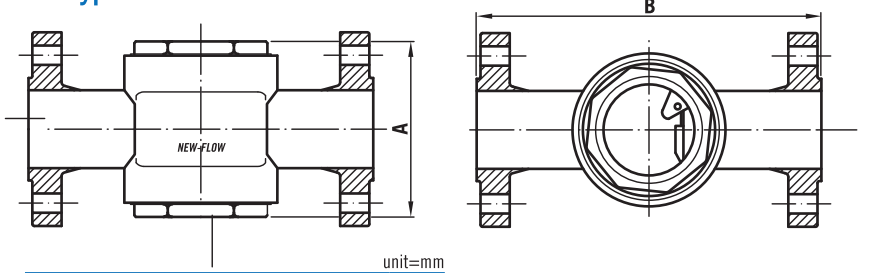

unit=mm

Size \ Range	15A	20A	25A	40A	50A
A	114	114	114	130	150
B	130	130	160	200	220
B (option)	140	140	140	180	220

FB Type

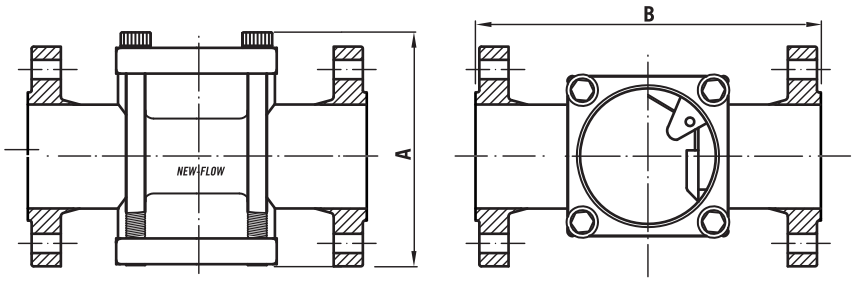

unit=mm

Size \ Range	15A	20A	25A	40A	50A	65A	80A	100A	125A	150A	200A
A	72	72	72	115	129	134	150	190	240	250	345
B	130	130	160	200	220	270	270	320	380	420	500
B (option)	140	140	140	180	220	260	260	310	–	–	–

Mounting Position

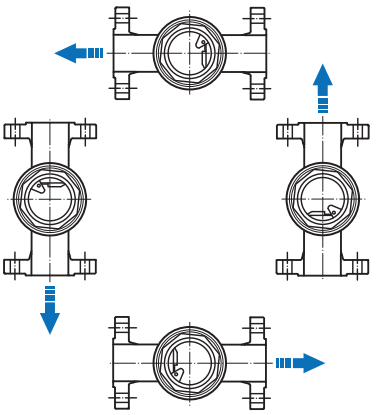

Ordering Information

FA/FB	Code	Model
	S	Wetted parts are SS316

Code	Size
	(1) 15A (2) 20A (3) 25A (4) 40A (5) 50A (6) 65A (7) 80A (8) 100A (9) 125A (10) 150A (11) 200A

Code	Connection Rating
	(1) JIS 10K (2) JIS 20K (3) ANSI 150# (4) ANSI 300# (5) PN10 (6) PN16 (7) PN25 (8) Option

Code	Gasket Material
	(1) Teflon (2) Gore-Tex

					Complete Ordering Code

WWW.NEW-FLOW.COM • TEL: 886-7-8135500 • FAX: 886-7-8225588 • Email: info@new-flow.com