

OVER PRESSURE PROTECTOR

OPT

This protector be assembled with components of body, spring-loaded piston and adjusting nut as well as o-ring to protecting gauges.

The protector closed at a set point pressure when over pressure flow in to gauges.

Technical Data

Range: 2~250 kg/cm²

Connection Size: ½"NPT female x ½"NPT male

Material: Body- SS316


Spring-loaded Piston- SS316

Adjusting Nut- SS316

O-Ring- Viton

Max. Working Temperature: 80°C

Max. Working Pressure: 300 kg/cm²

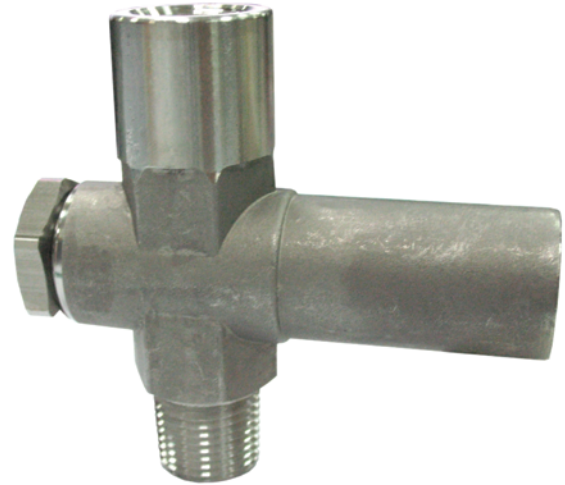

Adjustable Range Table

B	C	D	E
2~6	5~25	20~60	50~250

unit=kg/cm²

Ordering Information

OPT	Code	Process Connection
↓	M	½"NPT male
	↓	Code Gauges Connection
		F
	↓	Code Adjustable Range
		See adjustable range table.
OPT		Complete Ordering Code

Dimensions

