




ISO 9001
REGISTERED

NEW-FLOW

MANUFACTURE OF FLOW SIGHT GLASS INDICATOR

FS SERIES

Instruction Manual

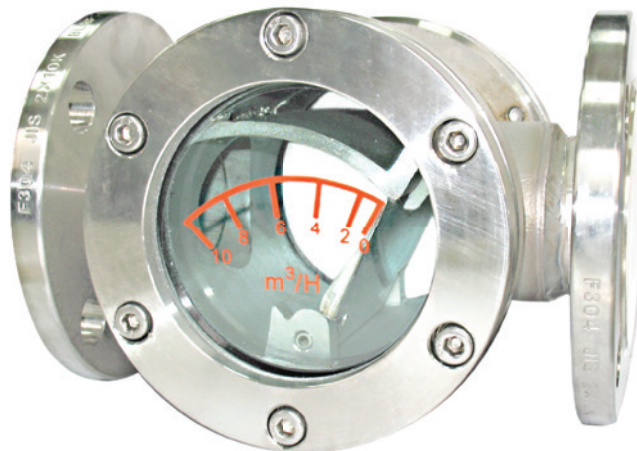

Approvals:



NEW-FLOW TECHNOLOGIES, INC.

No.9 Lane 133, Xing-Hua St., Chien Chen Dist., Kaohsiung 806, Taiwan

TEL: 886-7-8135500 FAX: 886-7-8225588 / 8159758

Email: info@new-flow.com www.new-flow.com

Technical Data

Service: – Water treatment system
 – Industrial liquid flow system
 – Double window indication

Material: Body– SS316; Paddle– SS316; Spring– SS316; Guge– Tempered glass;
 Gasket– Teflon or Gore Tex; Flange– SS316, SS304 available


Max. Working Temperature: 80°C

Max. Working Pressure: 10 kg/cm² at 25°C water


Connection Size: 2"

Connection Rating: JIS 10K, ANSI 150#, PN10 and PN16 available

Dimensions

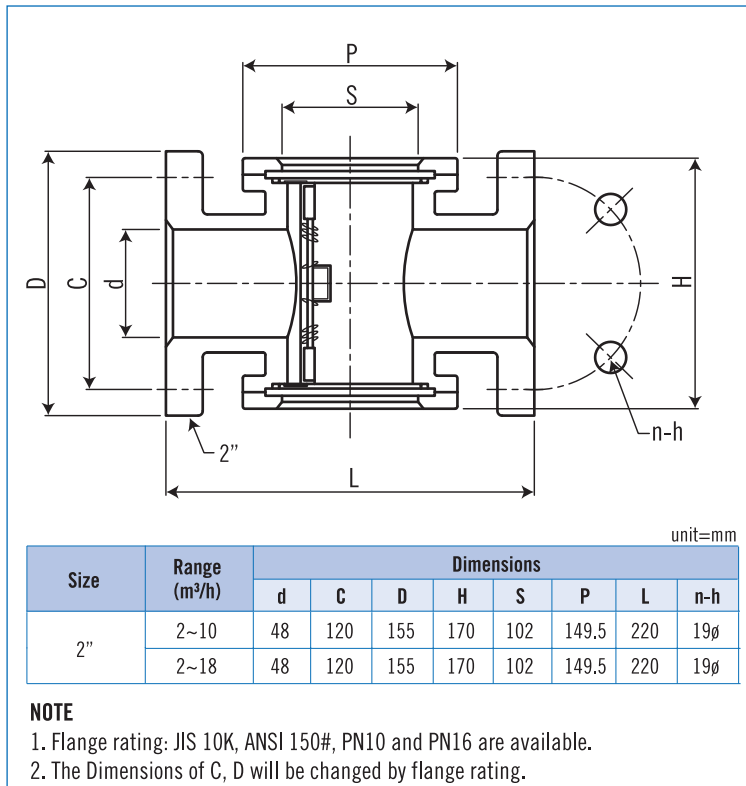

Mounting Position

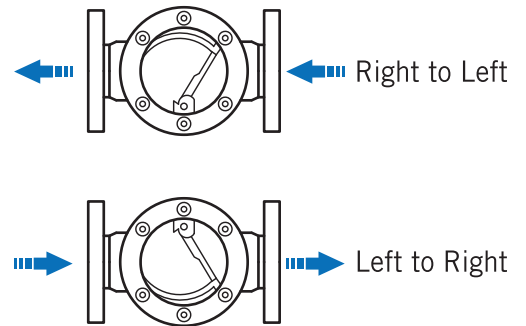

Operation Warning

1. Solid Bigger than 1.0mm in fluid. Strainer has to be installed in pipe ahead of sight glass gauge.
2. Avoid any pressure surge of fluid.

Parts & Material List

